




THE BRICK LIGHT

SPECIFICATIONS:

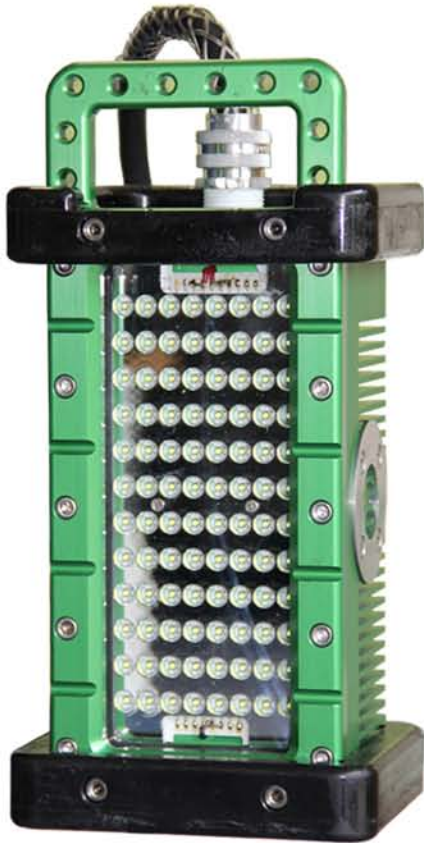

- XP-G LEDs emitting color at 6000K (+/- 200K)
- UL approved for Hazardous Locations: C1, D1 and D2 Groups C and D; CII, D1 and D2, Groups E, F and G
- Rated at ~11,520 lumens and >50,000 lux at 1 foot with optics
- Reflective optical design for targeted focus (Available in 60° to 120° dispersive beam angle)
- Low current and DC Voltage to light: 48VDC and 3A
- LEDs driven at: 0.35A and 3VDC
- Temperature rating: T5
- Conforms to UL STD 781, 844, 153 & 8750
- Dimensions: Length= 10" x Width= 5" x Height= 5"
- Weight: 10-13 lbs depending on model
- Mounting: Magnet:Stake:Tripod:Hook:Adjustable Stands
- Tank:Wet Location:Confined Space:Utility:Area Light

PARTS:

Comes standard with 100 feet of wire. Various configurations are application dependant.